


GEC Durham Industries, Inc.

TYPE AB

INSTRUMENT CURRENT TRANSFORMER
600 VOLT CLASS LARGE TYPE II

STANDARD FEATURES:

- 60 Hertz, 600 VAC, 10KV Bil.
- Clear sealable secondary terminal cover
- Retained shorting device
- Tin plated copper removable bus bar
- #6-14 Potential terminal
- Certified test record with each transformer
- Meet ANSI, NEMA AND EEL standards

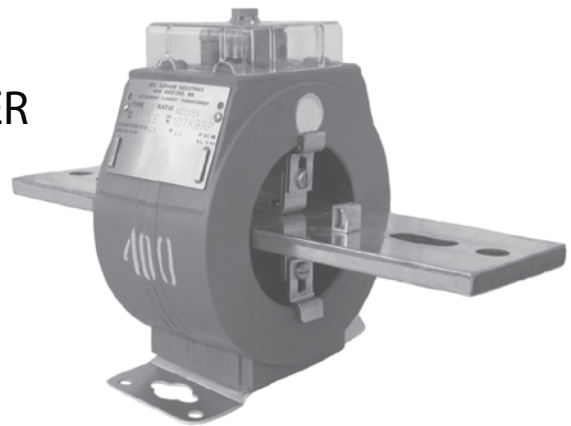

TYPE AB WITH REMOVABLE BUS BAR WITH STUD TYPE SECONDARY TERMINALS

Aluminum Low Mounting Base Included

MODEL	PRIMARY AMPS	CATALOG NUMBER	BURDEN 0.3 ACCURACY CLASS	30C RATING FACTOR	55C RATING FACTOR	FIGURE	WEIGHT
AB11	100	124K	0.1	4.0	4.0	2	11lbs.
AB11	100	122K	0.2	4.0	4.0	1	15lbs.
AB21	200	105K	0.5	4.0	4.0	2	13lbs.
AB31	300	106K	0.5	2.0	1.5	2	13lbs.
AB41	400	107K	0.5	4.0	3.0	5	11lbs.
AB61	600	108K	0.5	2.0	1.5	5	10lbs.
AB81	800	109K	0.5	2.0	1.5	5	10lbs.
AB101	1000	134K	0.5	2.0	1.5	6	10lbs.
AB121	1200	135K	1.8	1.5	1.1	6	10lbs.
AB151	1500	136K	1.8	1.5	1.1	9	12lbs.
AB201	2000	137K	1.8	1.5	1.1	10	18lbs.
AB301	3000	138K	1.8	1.33	1.0	13	20lbs.
AB401	4000	139K	1.8	1.0	0.7	13	21lbs.

DUAL RATIO

AB2/41	200/400	113K	0.5/0.5	4.0/2.0	3.0/1.5	2	13lbs.
AB3/61	300/600	114K	0.5/0.5	2.0/2.0	1.5/1.5	5	11lbs.
AB4/81	400/800	115K	0.5/0.5	2.0/2.0	1.5/1.5	5	11lbs.
AB10/201	1000/2000	143K	0.5/1.8	2.0/1.5	1.5/1.1	10	18lbs.
AB15/301	1500/3000	144K	1.8/1.8	1.5/1.33	1.1/1.0	13	21lbs.
AB20/401	2000/4000	145K	1.8/1.8	1.5/1.0	1.1/0.7	13	21lbs.

EXTENDED RANGE TRANSFORMER WITH REMOVABLE BUS BAR

WITH PRESSURE TYPE SECONDARY TERMINALS

Aluminum Low Mounting Base Included

MODEL	RATIO	CATALOG NUMBER	RATED BURDEN	0.6% ACCURACY CLASS	0.3% ACCURACY CLASS	30C RATING FACTOR	55C RATING FACTOR	FIGURE	BAR	WEIGHT
AB51Y	500:5	121YKP	0.5	20-199 AMPS	200-2000 AMPS	4.0	3.0	6	4 Hole	10lbs.
AB51Y	500:5	276YKP	0.5	20-199 AMPS	200-2000 AMPS	4.0	3.0	5	Slotted Hole	10lbs.

Specifications Subject to Change Without Notice.