


# E FASTENERS

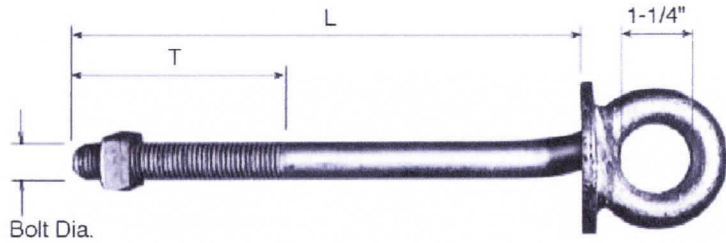

## 2720 Shoulder Eyebolt

| Stock No.                     | Bolt Dia. | Length L | Thread T | Weight 100 Pcs. |
|-------------------------------|-----------|----------|----------|-----------------|
| <b>1/2" Shoulder Eyebolts</b> |           |          |          |                 |
| 2720.54-1-1/8                 | 1/2"      | 4"       | 1-1/8"   | 102 lbs.        |
| 2720.55-1-1/4                 | 1/2"      | 5"       | 1-1/4"   | 110 lbs.        |
| 2720.56-3                     | 1/2"      | 6"       | 3"       | 118 lbs.        |
| 2720.57-3                     | 1/2"      | 7"       | 3"       | 126 lbs.        |
| 2720.58-4                     | 1/2"      | 8"       | 4"       | 134 lbs.        |
| 2720.510-4                    | 1/2"      | 10"      | 4"       | 142 lbs.        |
| 2720.512-4                    | 1/2"      | 12"      | 4"       | 150 lbs.        |

|                               |      |     |    |          |
|-------------------------------|------|-----|----|----------|
| <b>5/8" Shoulder Eyebolts</b> |      |     |    |          |
| 2720.64-3                     | 5/8" | 4"  | 3" | 120 lbs. |
| 2720.66-3                     | 5/8" | 6"  | 3" | 168 lbs. |
| 2720.68-4                     | 5/8" | 8"  | 4" | 192 lbs. |
| 2720.610-4                    | 5/8" | 10" | 4" | 204 lbs. |
| 2720.612-6                    | 5/8" | 12" | 6" | 216 lbs. |
| 2720.614-6                    | 5/8" | 14" | 6" | 235 lbs. |
| 2720.616-6                    | 5/8" | 16" | 6" | 240 lbs. |
| 2720.618-6                    | 5/8" | 18" | 6" | 250 lbs. |
| 2720.620-6                    | 5/8" | 20" | 6" | 268 lbs. |
| 2720.622-6                    | 5/8" | 22" | 6" | 288 lbs. |
| 2720.624-6                    | 5/8" | 24" | 6" | 308 lbs. |

|                               |      |     |    |          |
|-------------------------------|------|-----|----|----------|
| <b>3/4" Shoulder Eyebolts</b> |      |     |    |          |
| 2720.74-3                     | 3/4" | 4"  | 3" | 168 lbs. |
| 2720.76-3                     | 3/4" | 6"  | 3" | 200 lbs. |
| 2720.78-3                     | 3/4" | 8"  | 3" | 245 lbs. |
| 2720.710-4                    | 3/4" | 10" | 4" | 270 lbs. |
| 2720.712-6                    | 3/4" | 12" | 6" | 293 lbs. |
| 2720.714-6                    | 3/4" | 14" | 6" | 320 lbs. |
| 2720.716-6                    | 3/4" | 16" | 6" | 340 lbs. |
| 2720.718-6                    | 3/4" | 18" | 6" | 360 lbs. |
| 2720.720-6                    | 3/4" | 20" | 6" | 374 lbs. |
| 2720.722-6                    | 3/4" | 22" | 6" | 396 lbs. |
| 2720.724-6                    | 3/4" | 24" | 6" | 421 lbs. |
| 2720.726-6                    | 3/4" | 26" | 6" | 443 lbs. |
| 2720.728-8                    | 3/4" | 28" | 8" | 470 lbs. |

|                               |      |     |    |          |
|-------------------------------|------|-----|----|----------|
| <b>7/8" Shoulder Eyebolts</b> |      |     |    |          |
| 2720.810-4                    | 7/8" | 10" | 4" | 302 lbs. |
| 2720.812-6                    | 7/8" | 12" | 6" | 341 lbs. |
| 2720.814-6                    | 7/8" | 14" | 6" | 379 lbs. |
| 2720.816-6                    | 7/8" | 16" | 6" | 417 lbs. |
| 2720.818-6                    | 7/8" | 18" | 6" | 455 lbs. |
| 2720.820-6                    | 7/8" | 20" | 6" | 494 lbs. |
| 2720.822-6                    | 7/8" | 22" | 6" | 532 lbs. |
| 2720.824-6                    | 7/8" | 24" | 6" | 570 lbs. |
| 2720.826-8                    | 7/8" | 26" | 8" | 608 lbs. |
| 2720.828-8                    | 7/8" | 28" | 8" | 647 lbs. |
| 2720.830-8                    | 7/8" | 30" | 8" | 685 lbs. |
| 2720.832-8                    | 7/8" | 32" | 8" | 723 lbs. |
| 2720.834-8                    | 7/8" | 34" | 8" | 761 lbs. |
| 2720.836-8                    | 7/8" | 36" | 8" | 800 lbs. |

Hughes Brothers Welded Shoulder Eyebolts feature a 3" round washer welded to an eyebolt. The 2720 shoulder eyebolts are manufactured from SAE C1018 cold drawn or ASTM A36 steel. All shoulder eyebolts are galvanized in accordance with ASTM A153. Each shoulder eyebolt is furnished with one nut.

### Tensile Strengths

| Bolt Diameter | Minimum Tensile Strength |
|---------------|--------------------------|
| 1/2"          | 7,800 lbs.               |
| 5/8"          | 12,400 lbs.              |
| 3/4"          | 18,350 lbs.              |
| 7/8"          | 25,400 lbs.              |