


Hardware Fittings — Ductile Iron

Socket Eye

Socket eyes can be used for connecting conductor clamping devices to ball and socket type insulators.

Material: Body – galvanized ductile iron
Cotter Pin – stainless steel

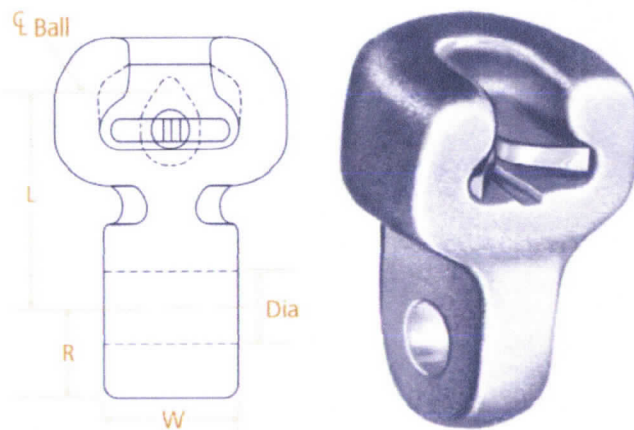

DUCTILE IRON

SA

Product Data

Catalog Number	Ultimate Strength lb (kN)	Dimensions Inches (mm)				Approx Wt Each lb (kg)
		W	R	L	Diameter	
SA04	18,000 (80)	½ (12.7)	⅜ (20.6)	2⅜ (52.4)	⅜ (17.5)	1.25 (.57)
SA049	20,000 (89)	½ (12.7)	⅜ (20.6)	¾ (82.6)	⅝ (14.3)	1.28 (.58)
SA05	20,000 (89)	⅝ (15.9)	⅜ (20.6)	2⅜ (52.4)	⅜ (17.5)	1.25 (.57)
SA06	25,000 (111)	¾ (19.1)	⅜ (20.6)	2⅜ (52.4)	⅜ (17.5)	1.30 (.59)
936032000	27,000 (120)	¾ (19.1)	1 (25.4)	3 (76.2)	⅜ (20.6)	2.2 (1.00)
SA07	30,000 (133)	⅞ (22.2)	⅜ (20.6)	2⅜ (52.4)	⅜ (17.5)	1.35 (.61)
SA10	30,000 (133)	1 (25.4)	⅜ (20.6)	2⅜ (52.4)	⅜ (17.5)	1.40 (.64)
SA10054	30,000 (133)	1 (25.4)	⅜ (20.6)	5½ (139.7)	⅜ (17.5)	1.90 (0.86)
SA11	30,000 (133)	1⅛ (28.6)	⅜ (20.6)	2⅜ (52.4)	⅜ (17.5)	1.50 (.68)
936062000	30,000 (133)	1¼ (31.8)	1 (25.4)	3 (76.2)	1⅜ (27)	2.3 (1.04)
936063002	30,000 (133)	1¼ (31.8)	1 (25.4)	3 (76.2)	1⅜ (30.2)	2.3 (1.04)
SA13	30,000 (133)	1⅜ (34.9)	⅜ (20.6)	2⅜ (52.4)	⅜ (17.5)	1.70 (.77)
SA13054	30,000 (133)	1⅜ (34.9)	⅜ (20.6)	5½ (139.7)	⅜ (17.5)	2.00 (0.91)
SA1550 ⁽¹⁾	50,000 (222)	1⅝ (41.3)	1 (25.4)	3⅝ (83.3)	1⅜ (27)	3.00 (1.36)
SA15501 ⁽¹⁾	30,000 (133)	1⅝ (41.3)	1 (25.4)	3⅝ (83.3)	⅜ (17.5)	3.00 (1.36)
SA15502 ⁽¹⁾	30,000 (133)	¾ (19.1)	1 (25.4)	3⅝ (83.3)	⅜ (17.5)	2.75 (1.25)
SA15503 ⁽¹⁾	36,000 (160)	1⅝ (33.3)	1 (25.4)	3⅝ (83.3)	⅜ (20.6)	2.90 (1.32)
SA16	30,000 (133)	1¾ (44.5)	⅜ (20.6)	2⅜ (52.4)	⅜ (17.5)	1.80 (.82)
SA20	30,000 (133)	2 (50.8)	⅜ (20.6)	2⅜ (52.4)	⅜ (17.5)	1.85 (.84)