



CATALOG NUMBER	THREAD	A	B	C
8600M	3/8-16UNC	5/8	0.84	21/64
55083P	1/2-13UNC	13/16	1.10	7/16
55084P	5/8-11UNC	1	1.36	35/64
55085P	3/4-10UNC	1-1/8	1.53	21/32
56538P	7/8-9UNC	1-5/16	1.78	49/64
56073P	1-8UNC	1-1/2	2.04	7/8

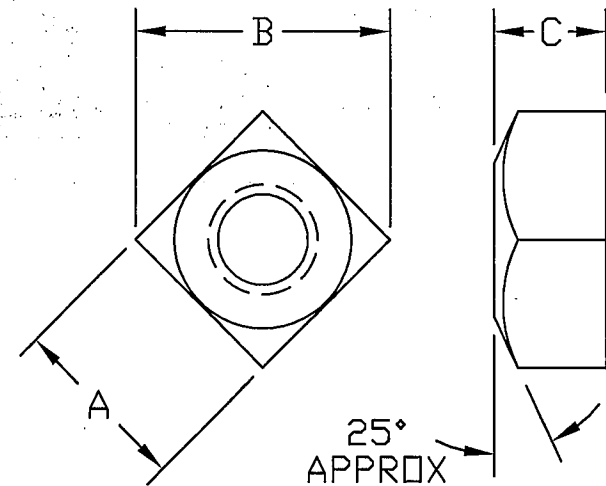

NOTES:

- 1.) ALL NUTS ARE GRADE 2 EXCEPT FOR 1/2" WHICH IS GRADE 5.
- 2.) NUTS ARE HOT DIP GALVANIZED PER ASTM A153 (LATEST REV.) AND THREADS ARE TAPPED AFTER GALVANIZING FOR GALVANIZED BOLTS.
- 3.) NUTS MEET ALL REQUIREMENTS OF ANSI C135.1 (LATEST REV.)

CHANCE TOLERANCE CHART		 HUBBELL POWER SYSTEMS <small>POWER SYSTEMS, INC.</small>	
<small>CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>		TITLE SQUARE NUTS	
		SIZE DWG NO. SB SA55083P	CAT / PART / ASSY NO. SEE CHART
<small>DO NOT SCALE THIS DRAWING</small>	DRN BY JJL	DATE 05/11/09	SHEET 01 OF 01